FULLVIEW STYLIST

DRAMATIC
ULTRA-MODERN
UPSCALE GLASS



COLORS







Anodized



Anodized





 $^*Color Select ^{\scriptscriptstyle \mathsf{TM}} \ uses \ Sherwin$ Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating

*Printed colors may not be accurate. Contact your local Midland dealer for exact

SPECIFICATIONS	Stylist Glass Panel
U-Factor	Not Tested
Frame	6063-T Aluminum
Thickness	2 inches
Stylist XL Glass	3/4 inch insulated
Stylist LT Glass	½ inch insulated ¼ inch non-insulated ½ inch non-insulated
Panel	_
Rails	Insulated non-insulated
Air Infiltration Seal	

Warranty* Excludes Springs


*For full warranty details contact your Midland dealer

Cross linked polyethylene*

*Optional

Stylist Cross Section*

*Pictured with optional insulation

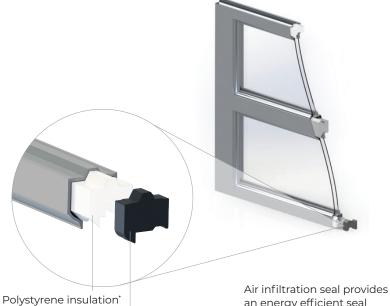

5 years

an energy efficient seal to help maintain building temperature

GLASS



STYLIST LITE

Doors up to 7' 2" Doors 7' 3" to 12' 2" wide = 1 panel wide = 2 panels

Doors 12' 3" to 18' 2" wide = 3 panels



STYLIST XL

Doors 10' 3" to 18' 2" Doors up to 10' 2" wide = 1 panel wide = 2 panels

